


Technical Specification

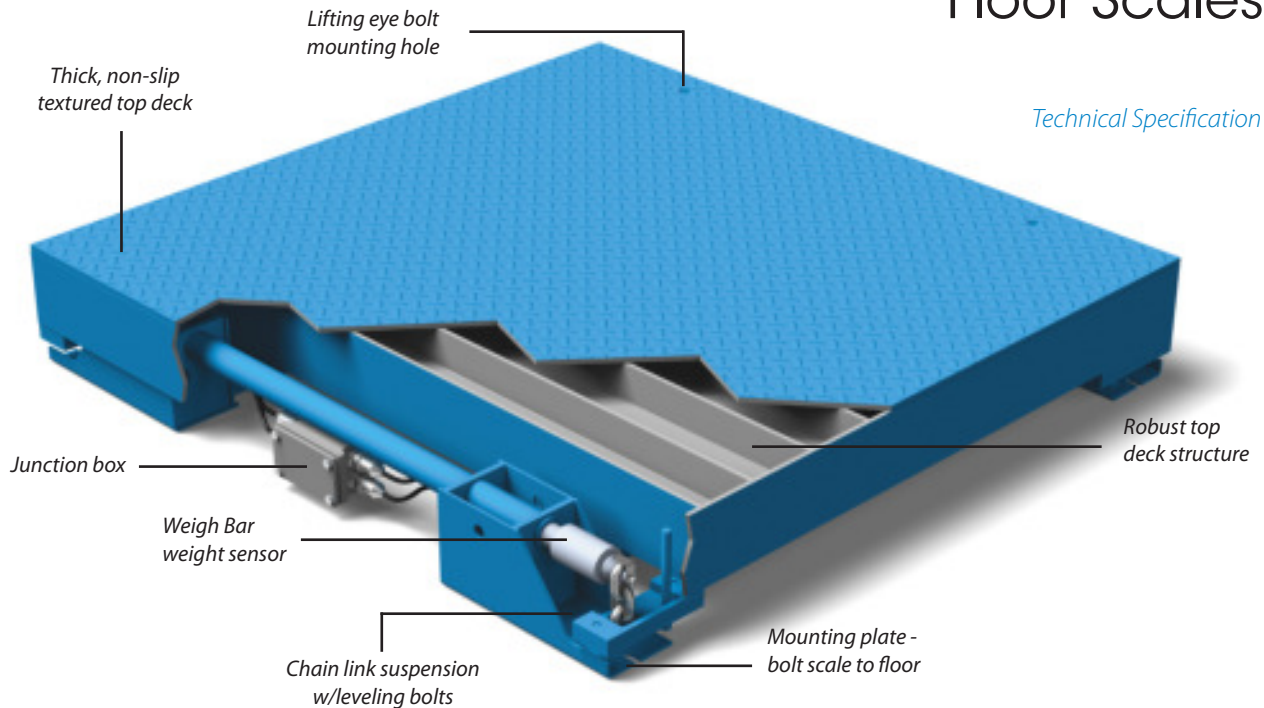

## DESCRIPTION

### General

Perhaps the most robust deck scale on the market today, the DS from Avery Weigh-Tronix has stood the test of time in some of the world's most demanding weighing applications. Known for its longevity and trouble-free operation, the rugged overload stop design of the DS has been tested time and time again to withstand some of the harshest and most severe conditions - a unique attribute that helps mitigate the high service and repair costs that are associated with less robustly engineered floor scales.

### Design

**High steel content** – With more steel content than the average deck, the DS is engineered to withstand the most intensive and even abusive operating conditions.

**Built to last** – The DS comes with high strength steel deck plates designed to provide superior rigidity. The deck plates are welded to internal steel channels providing greater support and robustness. All cables are protected within the deck to eliminate potential damage to wiring. This reduces downtime, maintenance charges, and extends the life of the scale.

**Exceptional accuracy** – The DS is fitted with a Weigh Bar® designed to exceed the accuracy levels of a traditional load cell. The Weigh Bar is rugged, reliable and highly precise. Validated with in-house rigorous test analysis, the Weigh Bar provides the precision needed to help substantiate critical business decisions. The Weigh Bar includes sensors that have been positioned in a more concealed and robust area providing high reliability.

**Unique chain link design** – The unique chain link suspension system allows operators to place deck load on the Weigh Bar while minimizing extraneous side and end loads. This results in improved accuracy and scale performance. The chain links also absorb shock loads rather than transfer them to the Weigh Bar.

**Side impact protection** – The DS includes side and end stop plates which were designed to overcome potential side impact from damaging the Weigh Bar.

**Fast and simple to install** – The chain link on the DS includes "U" bolts which have an adjustable leveling design. This allows for a quick and easy installation.

**Pit mounting** – When space becomes a constraint, the DS provides the versatility and flexibility of pit mounting to provide a central location for weighing.

**Axle loading** – The DS axle load ratings are 50%: 5,000 lb for a 10,000 scale; 10,000 lb for 20,000 lb; and 25,000 lb for 50,000 lb capacity scales.

# DS DECK SERIES FLOOR SCALES *Technical Specification*

## STANDARD SIZES, CAPACITIES AND FINISHES

	Model No.	Dimensions	Stainless Steel	Powder Coat	Urethane Finish
500 lb x 0.05, 0.1 or 0.2	DS-2424A-005*	24 x 24 x 4 $\frac{1}{2}$ in (61 x 61 x 12 cm)	X	X	
1,000 lb x 0.1, 0.2, 0.5 or 1.0	DS-2424A-01*	24 x 24 x 4 $\frac{1}{2}$ in (61 x 61 x 12 cm)		X	
	DS-3030A-01*	30 x 30 x 4 $\frac{1}{16}$ in (76 x 76 x 12 cm)	X	X	
5,000 lb x 0.5, 1.0 or 2.0	DS-4848-05	48 x 48 x 6 $\frac{1}{2}$ in (122 x 122 x 17 cm)		X	
	DS-6060-05	60 x 60 x 6 $\frac{1}{2}$ in (152 x 152 x 17 cm)		X	
10,000 lb x 1.0, 2.0, 5.0, or 10.0	DS-4848-10	48 x 48 x 7 in (122 x 122 x 18 cm)		X	
	DS-7248-10	72 x 48 x 7 in (183 x 122 x 18 cm)			X
	DS-6060-20	60 x 60 x 8 in (152 x 152 x 20 cm)		X	
20,000 lb x 2.0, 5.0, 10.0 or 20.0	DS-7260-20	72 x 60 x 8 in (183 x 152 x 20 cm)			X
	DS-8460-20	84 x 60 x 8 in (213 x 152 x 20 cm)			X
	DS-9672-20	96 x 60 x 8 in (244 x 183 x 20 cm)			X

## SPECIFICATIONS

### GENERAL

<b>Construction</b>	Welded support channels. All cables protected within the deck to eliminate potential damage to wiring <i>5,000/10,000/20,000 lb capacity: 3/16" top plate</i> <i>500/1,000 lb capacity: 1/4" top plate</i>
<b>Lifting Positions</b>	Over 48" – two lifting eyes each on the short side of the scale
<b>Lifting Eye Size</b>	0.38-16 UNC or 0.5-13 UNC
<b>Weight Sensor</b>	Four Weigh Bars*
<b>Weigh Bar Output</b>	1 or 2 mv/v
<b>Overload Protection</b>	200%
<b>End Loading</b>	100%
<b>Operating Temperature</b>	14° to 104°F (-10° to 40°C)
<b>Excitation</b>	Up to 20 vdc (generated by the weight display)
<b>Resolution</b>	<i>Legal-for-Trade applications: 5,000 divisions</i> <i>Non-Legal-for-Trade applications: 10,000 divisions</i>
<b>Interface Cable</b>	25 ft cable included
<b>Agencies</b>	NTEP 5000d (CC# 88-221) Factory Mutual (FM) approved Weigh Bars and junction box when connected to the ZM155 Indicator. Suitable for Class I, II, III Divisions 1 & 2; Groups A, B, C, D, E, F, G. For Hazardous Area applications, contact the Avery Weigh-Tronix Industrial Support group for assistance Div. 1 & 2 barrier options with safe area ZM Indicators.



### SHIPPING WEIGHTS

Model No.	Carbon Steel	Stainless Steel
DS-2424A-005	130 lb (73 kg)	130 lb (73 kg)
DS-3030A-01	225 lb (102 kg)	225 lb (102 kg)
DS-4848-05	600 lb (272 kg)	600 lb (272 kg)
DS-4848-10	700 lb (317 kg)	700 lb (317 kg)
DS-6060-05	730 lb (331 kg)	730 lb (331 kg)
DS-6060-20	1,060 lb (482 kg)	1,060 lb (482 kg)
DS-7248-10	950 lb (431 kg)	950 lb (431 kg)
DS-7260-20	1,100 lb (499 kg)	1,100 lb (499 kg)
DS-8460-20	1,290 (585 kg)	1,290 lb (585 kg)
DS-9672-20	1,670 lb (757 kg)	1,670 lb (757 kg)



Low capacity stainless steel

# Avery Weigh-Tronix

[www.averyweigh-tronix.com](http://www.averyweigh-tronix.com)

Avery Weigh-Tronix is an ITW company



Avery Weigh-Tronix is a trademark of the Illinois Tool Works group of companies whose ultimate parent company is Illinois Tool Works Inc ("Illinois Tool Works"). Copyright © 2020 Illinois Tool Works. All rights reserved. This publication is issued to provide outline information only and may not be regarded as a representation relating to the products or services concerned. This publication was correct at the time of going to print, however Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service at any time.

DeckScale\_DS\_spec\_500452.indd  
V3 AWT35-500452