

Ideal for busy, demanding parcel and shipping applications

Technical Specification



Model 7815 shown with six-digit LCD internal display



Model 7815R shown with standard 7" remote only

DESCRIPTION

The 7815 and the 7815R (Remote) offer a durable 12" x 14" Bench Scale that is ideal for use within busy post mail and shipping environments.

This fast, accurate weighing platform can be used as a stand-alone scale or interfaced to shipping manifest software or receiving stations.

Designed with a hard wearing ABS weight platter and a rugged aluminum die cast housing that helps to protect a centrally mounted aluminum analog load cell from damage.

The 7815 can be supplied with a built-in, flush-fitting, six digit ½" high LCD display that is mounted to the left in the front face of the base.

The 7815R offers the ability to remotely mount the display away from the base.

The 7815 can also use a second remote display which can be plugged in to the rear of the base to give a customer facing weight reading (7815R has no 2nd remote display).

A range of emulation protocols is available within the scale to allow you to quickly select the correct compatible communication protocol to interface with a wide range of third party post, mail and shipping software programs or, host devices. This will be communicated through a serial RS232 port found on the rear of the base.

SPECIFICATIONS

COMMUNICATION


Connectivity 1x RS232 (9 way female D Type connector)
1x 2nd Remote display connection (RJ 45) *All are positioned on the rear of the base*

Supported Protocols Standard NCI default with field configurable settings of 8213, 3835, SMA, with Auto Weight Send (2400 – 19.2K baud range) *Transmits weight and scale status whenever ASCII "W" <CR> is sent by a remote device.*

7815 PARCEL SHIPPING SCALE *Technical Specification*

DISPLAY

Display Type	7815: Flush fitting six digit, ½" high LCD display 7815R: Remote six digit, ½" high digit LCD display housed in an extruded enclosure with a 7 foot cable Optional 2nd remote (for the 7815 only) Six digit ½" high LCD display housed in an extruded enclosure with a 7 foot cable, connected via RJ 45 connector on the rear of the scales base
Number of Displays Allowed	7815: 2 (1 standard, 1 remote display optional) 7815R: 1 remote display
Display Bracket Options	Optional 12" high pole mounted display bracket
Remote Display Housing Sizes	8" x 3" x 1.5"
Operational Keys	ZERO: Includes Auto Zero Tracking or Manual push button to re-establish zero reference. TEST: Runs a diagnostic test to ensure scale is fully functional, and allows a real-time view of internal settings
Units of Measure	lb
Incremental Selections	Multiples and sub-multiples of 1, 2, 5
Configurable Selections	Capacity, resolution, lb, filters, baud rates, protocols, auto printout, scale or post classifier <i>Default configuration is as postal weight classifier</i>
Time and Date	No
Base Sizes	12" x 14" x 4.5" (305mm x 357mm 114mm)

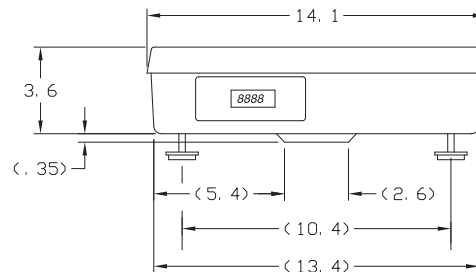

Top Pan Construction	Standard: Black ABS weight platter Stainless steel weight platter Ball top weight platter (9 balls)
Base Construction	Rugged with powder coated die cast aluminum housing and load bridge, housing a aluminum NTEP approved analog load cell
Feet	Lockable adjustable feet, 1" diameter with up to 1" of height adjustment
Base Capacity	Capacity (lb) 150 lb x 0.1 lb 150 lb x 0.05 lb (Non approved) <i>*Custom configuration; metric weighing can be configured in the field during calibration</i>
Power	120 VAC (+10% -15%), 60 Hz, standard 3-wire ground
Operating Environment	Temperature: 42° F to 104° F (5° C to 40° C) Relative Humidity: 10 to 95% (non-condensing)
Calibration	2 point calibration process (zero and span capacity) Field calibration can be carried out by using less than full capacity weights <i>Gravity compensation to allow the local gravity to be entered for where the scale is to be used</i>
Internal Resolution	1 part in 120,000
Filtering	Fast or Slow
Self-Diagnostics	2 level diagnostics: front panel display test or full service diagnostics. (Display, RAM, ROM, input/output & high resolution x10 division test)

OPTIONS

Pole Mount	12" high pole indicator stand, to allow easy viewing of the indicator
Ball Top Weight Platter	Stainless steel, using 9 roller balls to simplify handling and transport of all parcels. One piece lift-off design for easy field retrofitting



APPROVALS

Certifications	NTEP approved for use in Class III operations, CC 00-96
-----------------------	---



Avery Weigh-Tronix

www.averyweigh-tronix.com

Avery Weigh-Tronix is an ITW company



Avery Weigh-Tronix is a trademark of the Illinois Tool Works group of companies whose ultimate parent company is Illinois Tool Works Inc ("Illinois Tool Works"). Copyright © 2016 Illinois Tool Works. All rights reserved. This publication is issued to provide outline information only and may not be regarded as a representation relating to the products or services concerned. This publication was correct at the time of going to print, however Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service at any time.